


Nixalite Dryer Wall Vent Installation


Item #
DWV4W
DWV4B
DWV4K
DWV4T

Standard Install

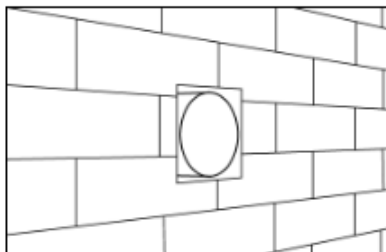


STEP ONE

Confirm that 4" duct is flush to the exterior substrate.

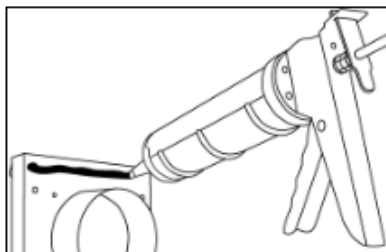


STEP TWO

Add sealant around the perimeter of the backing plate.

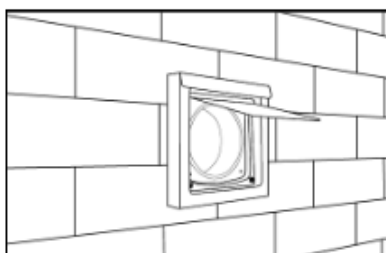


STEP THREE

Insert DryerWallVent collar into 4" duct. *If installing a No Collar unit, align opening with duct.

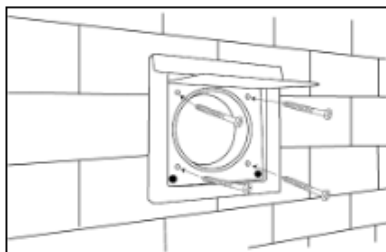

STEP FOUR

To secure to the substrate, install exterior rated fasteners through the inner screw holes.

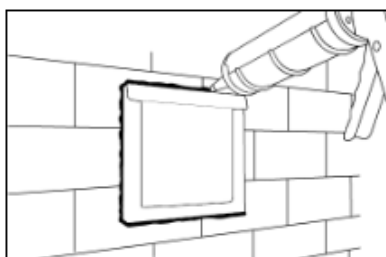

STEP FIVE

Apply sealant to all sides in contact with final exterior surface.

Tip: Bottom may be unsealed to allow for weeping.



Available from Nixalite of America (309) 755-8771
www.nixalite.com