



Installing Premium Model H Nixalite®

Generally, there are two applications for Model H Nixalite. A **Single Row** installation and an installation **With Model S** Nixalite. Choose the application that matches your installation and follow the spacing guidelines provided.

A Single Row

Installing one row of Model H on a narrow, **single exposed** ledge, 2" deep or less.

- A** Maximum surface coverage for Model H Nixalite is 2".
- B** Maximum distance from center of base strip to wall is 1/4".
- C** Minimum outside wire overhang is 1/4".
- D** At end of surface, the minimum strip overhang is 1/2".
- E** Mounting clip 'points' toward the wall.

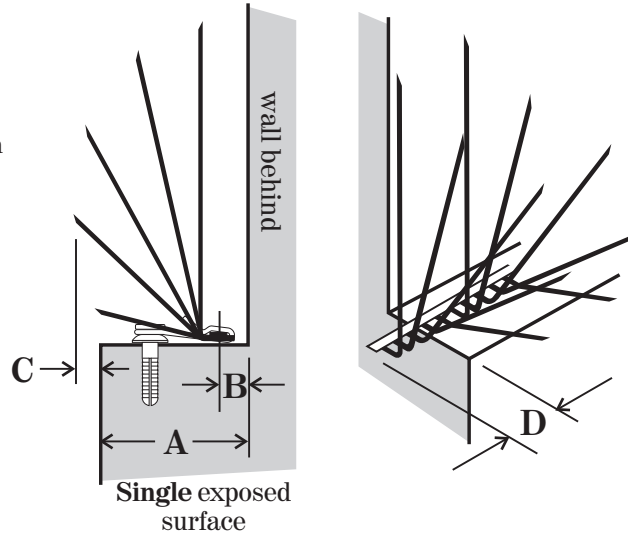



When installing Model H on a single exposed surface, make sure the mounting clip 'points' to the wall behind the surface.

The **Minimum Depth** for using the mounting hardware is generally 1-1/4". For surfaces less than 1-1/4" use alternate fastening or use **Model W** on wall above the surface.

With Model S

Installing Model H with Model S on wider surfaces to achieve proper coverage.

- A** Maximum distance between Model S and Model H is 2-1/2".
 - B** Single Exposed: maximum distance from wall is 2-1/4".
 - C** Maximum distance to outside edge of surface is 1-3/4".
 - D** Minimum outside wire overhang is 1/4".
- Minimum strip overhang at end of surface is 1/2". See single row guideline 'D'.

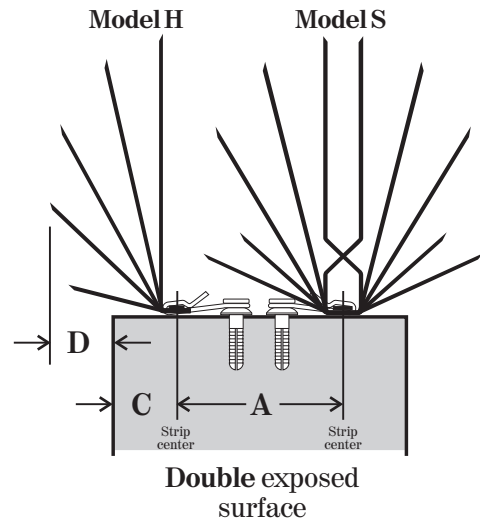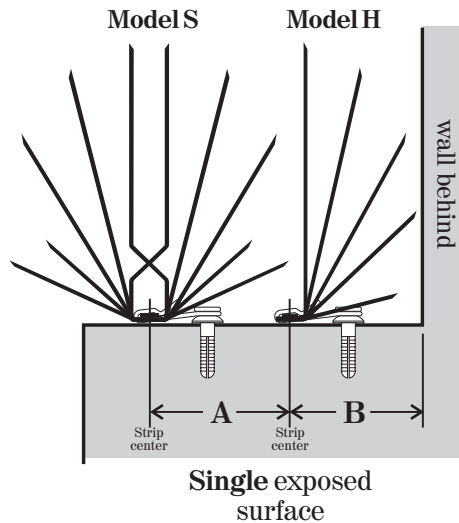

Use Model H with Model S on the following surface sizes:
Single exposed: 4" to 6-1/2" deep - Double exposed: 3-1/2" to 6" deep

Visit our website at www.nixalite.com or contact
 Nixalite at 800.624.1189 or fax 800.624.1196



Nixalite® of America Inc.
 1025 16th Avenue East Moline, IL. 61244
 Experts In Architectural Bird Control Since 1950

Phone: 800.624.1189 or 309.755.8771
 Fax: 800.624.1196 or 309.755.0077
 Email: birdcontrol@nixalite.com
 Web: www.nixalite.com



Where the World Shops for Humane Bird and Animal Control.